

Help us in our charitable endeavors:

Alpatronix donates \$1 to charity for every review you leave for our products. We don't want to influence your review, we just think every business must do some good in the world. Help us make the world a better place

AND help your fellow customers
by giving us your unbiased feedback.

As always, let us know if we can ever help in any way.

Thank you for being a contributing
citizen of this world.




ASPCA

unicef



User Manual for PX800 Portable Power Station for Portable Mobile Devices



Alpatronix is the trademark of Saritek Technical Solutions Inc. All other brands are registered trademarks of their respective owners.

Technical Specifications

Capacity: 93000mAh/3.2V/297.6Wh(15.5Ah.19.2V)

Battery: LiFePO4

INPUT:

Type-C1: 5V3A,9V-3A,15V-3A,20V-5A(100W max)

Type-C1+C2: 5V-3A,9V3A,15V-3A,20V-5A(100W max)

OUTPUT:

Type-C1/C2: 5V3A,9V-3A,15V-3A,20V-5A(100W max)

USB-A1/A2: QC 18W

Type-C1+C2: 100W max

Type-C1+C2+USB1+USB2: 65W+12W+7.5W+7.5W
(90W max)

Dimension: 166.3x120x105 mm


N.W: 2.4 kg

Compatible Devices

Smartphones, tablets, laptops, cameras, drones, portable gaming consoles, smartwatches, bluetooth devices, portable lights, small appliances.

Package Content

- Alpatronix PX800 Portable Power Station.
- PD100W Charging Cable
- Carrying Bag
- User Manual

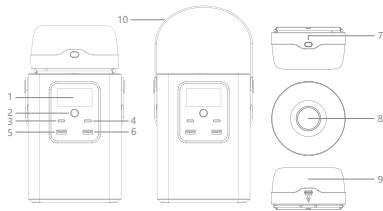

1. LCD Display Screen

2. Button: press once to check the power, press for 2.5S to turn on/off the top LED charging

3. Type-C1

4. Type-C2

5. USB-A1

6. USB-A2

7. LED Light Switch

8. Spotlight

9. LED Light

10. TPU Handle


Light Modes

Press and hold for 2.5 seconds to turn on/off SOS mode. Press once for low light, press again for high light, and press once more for the spotlight.

Important Safety and Charging Information

- Read all instructions and warnings prior to use. Alpatronix is not responsible for improper use of this product. Improper use may result in product damage, excess heat, toxic fumes, fire, or explosions, which may cause you harm.
- Do not leave this charger unattended while operating. Avoid operation by children, infants, or toddlers.
- Please ensure to operate this product in a well-ventilated area.
- Please unplug the power cord when the product is not in use.
- Avoid exposing the product to fire or high temperatures beyond 130°C/266°F to prevent explosion.
- Refrain from disassembling the product to avoid fire, explosions, injuries, and unforeseen risks.
- Do not use the product if it has damaged cords, plugs, or output cables to prevent electric shock.
- To ensure long battery life, charge this device at least once every 3 months.
- Avoid contact with liquids, moisture, steam, sweat, or any other form of water.
- Avoid bumps, drops, punctures, or any other forces.
- Avoid extreme temperatures such as freezing temperatures or 100 degrees.
- Avoid direct exposure to sunlight, UV, or any magnetic fields.
- Do not disassemble or repair this device.
- Minors must use this device under adult supervision.
- Do not dispose in trash. Take all batteries to your area's Household Hazardous Waste Collection Facility.

Light Modes

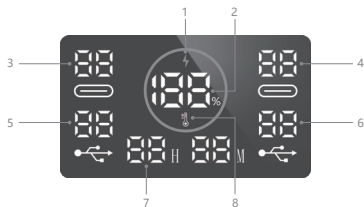

NOTE: There is a protective film on the LCD screen, you can remove it or leave it before using.

1. Charging Icon/PD Icon
2. Power Bank Battery Level
3. Type-C1 Input/Output Power
4. Type-C2 Input/Output Power
5. USB-A1 Output Power
6. USB-A2 Output Power
7. Remaining Charging/Discharging Time
8. Overload/Protection Icon

Warranty Information

Alpatronix offers an Iron-Clad 1-year limited warranty that covers you against all defects in material and workmanship. To register your product, visit

www.alpatronix.com/register

In case of any problems or questions, please contact us Monday – Friday, 8am – 4pm, Pacific Time.

Alpatronix warranty is only valid within the United States, and for purchases from authorized retailers.

(888) 407 – 7515

support@alpatronix.com

PO Box 68030, Anaheim, CA 92817