



To activate the 1-year warranty, visit www.alpatronix.com and click on the warranty link to register your product by filling out a quick and easy form. The Alpatronix warranty will fully cover your purchase against all defects in material and/or workmanship for an entire year. Most return policies only allow returns for a period of 14-30 days from the date of purchase, so hurry and register your product to give yourself peace of mind, knowing Alpatronix has got you covered for a whole year.

User manual for BX110 Battery Charger Case for iPhone 5



Alpatronix is the trademark of Saritek Technical Solutions Inc.
Bluetooth is the trademark of Bluetooth SIG Inc.


Product Specifications:

Model	X5
Input Voltage	5.0V/1.0A(Max)
Output Voltage	5.0±0.25V/1 A
Nominal Capacity	2000mAh
Adaptable for	iPhone 5 16G, 32G, 64G
Cell Type	Li-polymer / 2000mAh
Standby Time	Up to 225h
Talk Time	Up to 8h
3G Surfing Time	Up to 8h
Audio Play Time	Up to 40h
Video Play Time	Up to 10h
Dimensions	7.3mm (T) x 61mm (W) x 128.5mm (L)
Color	Silver/Black(customized color optional)
Weight	62g

Features:

- Built-in 2000mAh battery nearly doubles the battery operation time of your iPhone 5.
- Protective IC circuit efficiently prevents short circuits, overcharging, and malfunctions even during extreme conditions.
- Cut outs for all iPhone 5 features allow you to use your iPhone without removing it from the case.
- Strong and durable engineering and quality material protects your iPhone from dings and scratches.

Illustration:

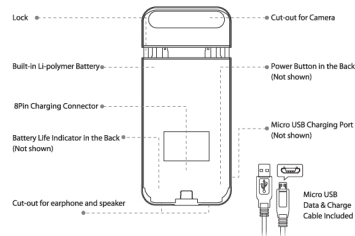


Charging the battery case:

- Connect the provided micro USB charging cable to any USB power source such as a computer to begin charging.
- Charge until the LED indicators stop flashing and glow steadily.

Use the battery case to charge your iPhone 5:

- Insert the iPhone 5 into the battery case.
- Press and hold the on/off button for 3 seconds to power on the case, and start charging your iPhone.
- Press and hold the on/off button for 3 seconds to power off the case, and stop charging your iPhone.
- Clicking the battery case turns on the indicator briefly to indicate remaining power in the battery case.
- When the power pack is fully drained, the charging signal on your iPhone will disappear.

Installation:

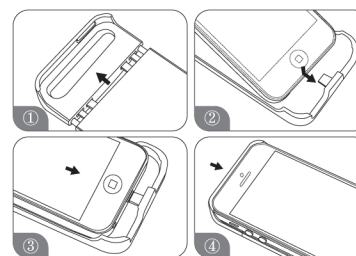

Battery Life Indicators:

MODE	CHARGING			
	LED1	LED2	LED3	LED4
Power < 25%	BLINKING	OFF	OFF	OFF
25% ≤ Power < 50%	ON	BLINKING	OFF	OFF
50% ≤ Power < 75%	ON	ON	BLINKING	OFF
75% < Power	ON	ON	ON	BLINKING
FULL	ON	ON	ON	ON
MODE	DISCHARGING			
	LED1	LED2	LED3	LED4
75% ≤ Power ≤ 100%	ON	ON	ON	ON
50% ≤ Power ≤ 75%	ON	ON	ON	OFF
25% ≤ Power ≤ 50%	ON	ON	OFF	OFF
Power ≤ 25%	ON	OFF	OFF	OFF
Empty	OFF	OFF	OFF	OFF

Package Contents:

- Battery Case
- Micro USB to USB charging cable
- User manual

Warning:

- To maximize battery capacity, please fully charge the battery case before first use by charging it for a full 12 hours.
- Be cautious of excessive drops, abrasions, or other impacts to the battery case. Please stop using immediately if excessive damage to external case has occurred.
- Do not expose the battery case to wet or damp conditions. Please keep in dry environments.
- Do not expose to extreme temperature. Do not use near heat emitting appliances.
- Please use the included USB charging cable. Please do not substitute other cables as they may damage this device.
- Do not attempt to replace any part(s) of the battery case. In case of any issues, please contact support@alpatronix.com for customer support.
- It is normal for the battery case to feel warm when charging the iPhone.
- Please do not dispose the battery case in trash. For disposal, please take to nearest battery recycling center.
- If you have not used the battery case for a prolonged period of time, please recharge before using it again.

Alpatronix is a registered trademark of

Saritek Technical Solutions, Inc.
3150 E. La Palma Ave, Suite F
Anaheim, CA 92806
United States